

# Manual - CL603BF Intelligent Bluetooth Fingerprint Key Pad


The CL603BF is an IP66 rated Electronic Keypad that can be fitted to a new or existing Electric Door. It can be operated via Bluetooth using the TTLock iOS/Android app without the need for Internet or Wi-Fi. It is suited for Homes, Offices, Airbnb, Motels etc. Specific codes can be sent via SMS or E-Mail. These codes can be temporary (1 day) or permanent. Bluetooth access (one time, temporary, or permanent) can also be shared by SMS or E-Mail. MiFare Fobs can also be programmed into the keypad. The user list can be managed through the TTLock app.






#### **Unlock Features:**


- Fingerprint
- TTLock App (iOS/Android)
- MiFare Card/ Fob
- Pin Code
- Remotely via Gateway (Optional)

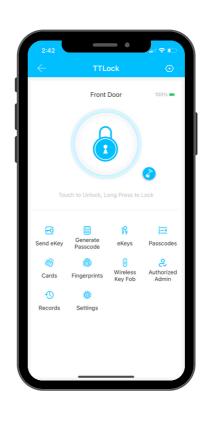





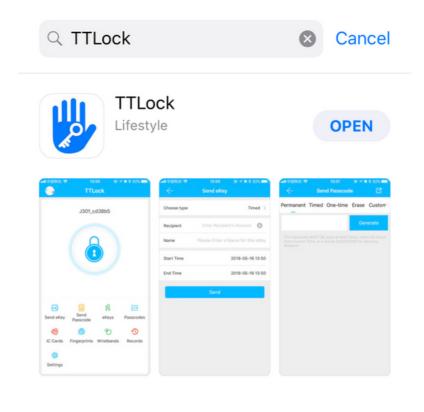







Apple (iOS)









# **Product Specifications**



Item no.	CL603BF
Dimensions	148x43.5x22mm
Ingress Protection (IP) Rating	IP66—Direct High-Pressure Water Resistance
Bluetooth Comms Distance	Within 10 Metres
Communication mode	Bluetooth 4.0BLE (Bluetooth Low Energy)
Unlocking Options	Bluetooth, Code, MiFare Fob
Support System	Android 5.0 / IOS 7.0 above
Unlock time	≈ 1.5 sec
Power supply	12V DC Connector
Static current	≤30uA
Working current	≤200mA



### **Product Features**



#### **5 Convenient Unlock Options**

- Fingerprint
- Pin Code
- Smart Phone (iOS/Android)
- MiFare Card/Fobs 13.56 Mhz
- Wierless Key Fob (Remote)
- Remotely via Gateway (Sold Separately)



## **Smart Key Pad Set Up**

#### 1 Download TTLock App

Search 'TTLock' on the app store or Google Play store & download the app.

## 2 Register & Log In


Users can register the account by email or mobile number. When registering users will receive a 'verification code' from email or mobile.


#### 3 Add Device


Add the keypad by going to the menu bar in the app. Select 'Add Lock' & select 'Door Lock' or 'All Locks'

> For in-depth resources and a manual on the CL603BF scan the QR code below:





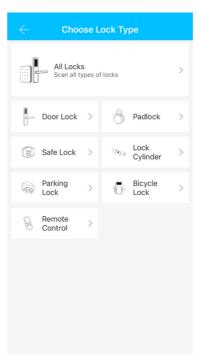

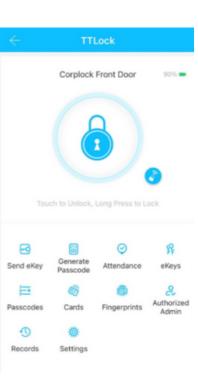

+ Add Lock

Gateway

Messages

Settings

□ Work with

(i) Customer Service

